## **Vertical Shaft Impact Crusher**

- 250-350TPH
- 3 ½" Feed Size
- Actech V250 VSI Crusher and 300HP **Electric Motor with Variable Speed** Drive

Actech 5x20 3-Deck Horizontal Shaft Screen

with Triple Shaft Under Screen **Conveyor and** Blending Chutes with Ability to Recirculate All

3 Decks Back to the VSI **Onboard Switchgear and Wiring** Included

 Available in Shoe and Anvil OR Rockon-Rock

Congurations

- Highway or Ocean Transportable
- Catwalks and Handrails Included
- All Necessary Guarding Included



## **PRODUCER BENEFITS**

- Cubical particle shape
- Gradation control
- Simple maintenance
- High product yield
- Non-plugging crushing chamber
- High fracture percentage
- Variable reduction ratios
- Heavy duty design

PARAMETERS	MODEL 250
Maximum Feed Size Longest Dimensions	3 5"/88 9 mm
Maximum Input Capacity T.P.H. Depending on Feed Size	250
Maximum Impeller R.P.M. Depending on Feed Size and Internal Configuration	1500
Table Diameter	32"/813 mm









Steel-On-Steel configuration for maximum production

Autogenous rock box for lower tonnage abrasion materials in high

## STANDARD FEATURES

- Hydraulic lid lifter
- Modular oil lube system
   Externally adjustable feed tube system
- Unitized construction
- Cast lid and tunnel liners

One piece tub and shroud liners

Motor mount and adjustable take-ups


V-belt drive

Heavy duty pedestal drive with double self-aligning spherical roller bearings

• 3, 4, 5 and 6-Shoe tables

One year manufacturer's warranty
Options include dust control systems, jib
crane (parts hoist), portable or
stationary, electric or diesel drives

## ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

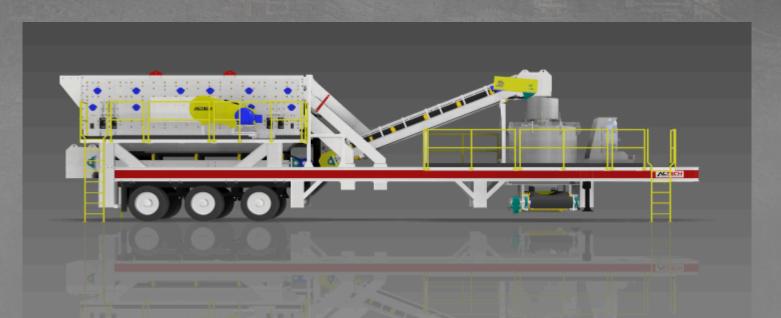

**1**-360-571-7703



sales@actechmfg.com

@actechmfg.com